

# **P150AJTK TRACKED**

**NEW GENERATION  
OF TRACKED PLATFORM  
DESIGNED FOR OVERHEAD  
WORK AND TO PROVIDE  
LOGISTICAL SUPPORT  
FOR THE WORKSITE**

**LIFETIME EXCELLENCE**



## TECHNICAL SPECIFICATIONS P150AJTK


Maximum working height	14.9 m
Maximum cage floor	12.9 m
Maximum lateral outreach	6.4 m*
Angle of main boom	0° + 80°
Turntable rotation	360°
Basket capacity	220 kg
Basket dimensions	1.4 x 0.7 x 1.1 m removable
Engine featured as standard	14 HP, petrol
Height in transport conditions	2.00 m
Width in transport conditions	1.4 m (0.78 m without basket)
Length in transport conditions	3.78 m (3.19 m without basket)
GVW	2100 kg

\* With basket rotation (opt)

## OPTIONAL

One-man basket
Electric pump for internal use
Towbar for trailer
Diesel engine
Non-marking track belts
Radio control for travel/stabilisation
Type-approved trailer
Basket rotation
Dual-speed travel system

## WORKING DIAGRAMS

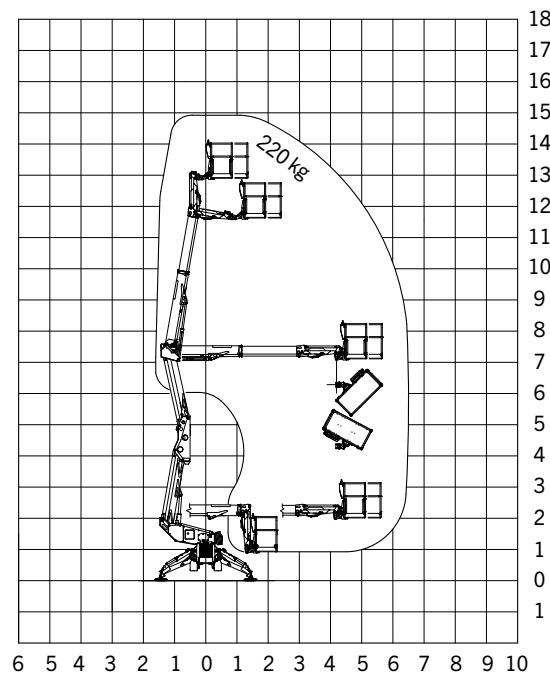

## DIMENSIONS



SALES DEALER